




Cilindros Hidráulicos en pulgadas (HYDRAULIC CYLINDERS (INCH SIZES)) Linea H – Dimensiones - Codificación (SERIES H - GENERAL DIMENSIONS - HOW TO ORDER)



MODELO H		15	20	25	30	35	40	45	50	60	80	100
Ø nominal		38,1	50,8	63,5	76,2	88,9	101,6	114,3	127	152,4	203,2	254
Area (cm2)		11,4	20,3	31,7	45,6	62,0	81,0	102,6	126,6	182,3	324,1	506,5
A	N	25	28	41	41	50	57	57	76	89	114	114
	S	28	41	50	50	57	76	76	89	101	140	140
B		46	63	76	89	102	120	127	140	178	230	305
AB		58	75	89	102	118	135	142	153	195	250	330
MM	N	19,05	25,4	34,92	34,92	44,45	50,8	50,8	63,5	88,9	114,3	114,3
	S	22,2	34,92	44,45	44,45	50,8	63,5	63,5	88,9	101,6	139,7	139,7
CC	N	5/8	7/8	7/8	7/8	1 1/4	1 1/2	1 1/2	2	2 1/4	2 1/2	3 1/2
	S	5/8	7/8	1	1	1 1/4	1 1/2	1 1/2	2	2 1/2	2 1/2	3 1/2
KK	N	1/2	3/4	7/8	7/8	1	1 1/4	1 1/4	1 1/2	2	2 1/2	2 1/2
	S	5/8	7/8	7/8	7/8	1	1 1/4	1 1/4	1 1/2	2	2 1/2	2 1/2
W		19	19	25	25	28	28	28	32	32	32	32
EE		1/2	1/2	1/2	1/2	3/4	3/4	3/4	3/4	1	1 1/2	1 1/2
LB		135	139	157	175	188	188	198	210	230	330	420
M		52	57	68	68	70	70	77	77	83	127	157
K		22	28	30	35	35	35	43	43	45	55	70
T		25	35	35	38	40	50	50	60	70	100	110
FT		25	38	38	44	50	70	70	89	100	150	175
CT		28	38	48	48	57	70	70	95	105	145	155

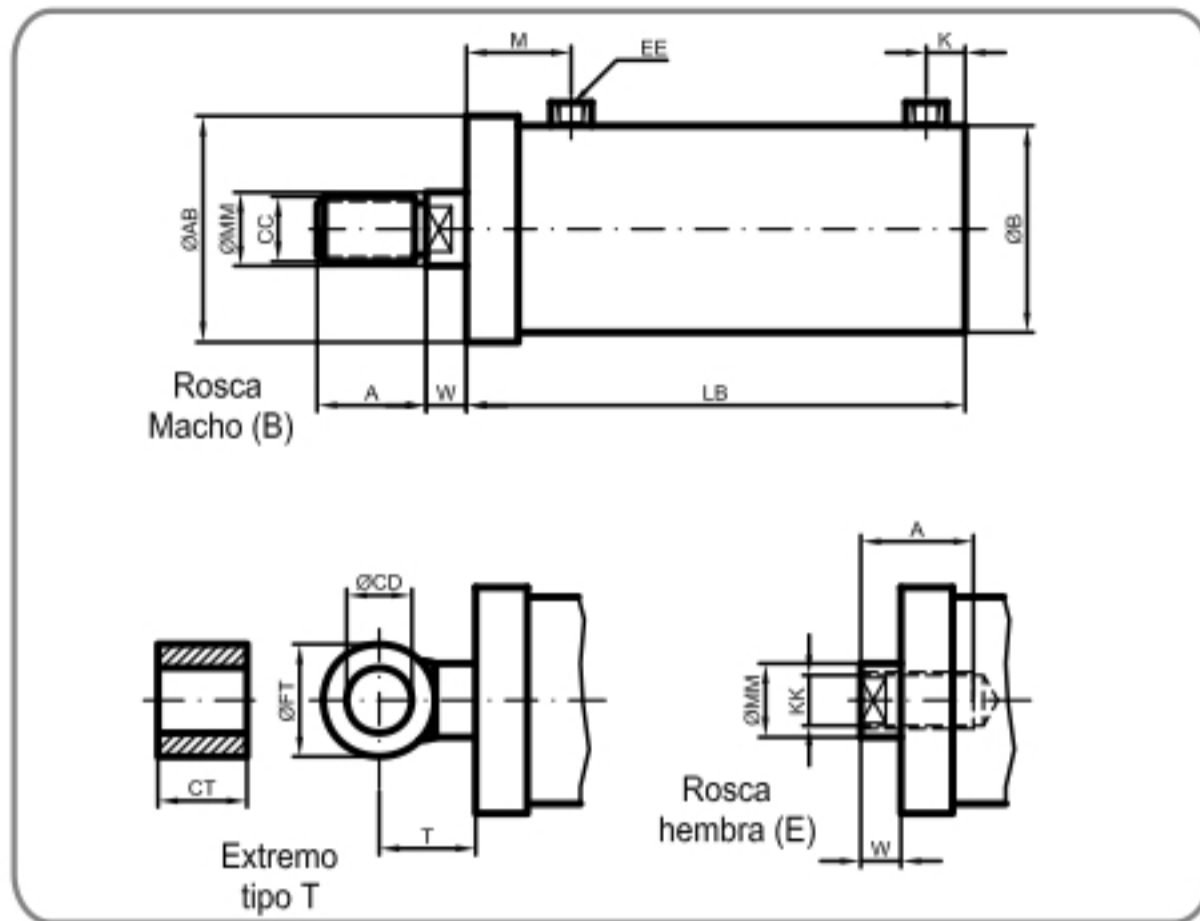

- Cilindros Hidráulicos de doble efecto
- Construcción soldada.
- Uso industrial y móvil
- Presión máxima de trabajo: 200 bar
- Fácil mantenimiento
- 8 tipos de montaje
- Diámetros de émbolo entre 1.5" y 10"

Cilindros Hidráulicos en pulgadas (HYDRAULIC CYLINDERS (INCH SIZES)) Montajes Línea H (MOUNTINGS - SERIES H)



MODELO H	15	20	25	30	35	40	45	50	60	80	100
CB	20	32,3	32,3	34	39	52	52	65	65	78	102
CD	12,7	19,05	19,05	22,2	25,4	34,92	34,92	44,45	50,8	76,2	88,9
L	19	32	32	38	38	54	54	57	63	82	102
CW	12	16	16	16	19	25	25	31	31	38	50
B2	10	14	18	20	23	25	25	30	32	45	51
D2	12	16	20	22	25	28	28	32	35	49	55
L3	40	45	55	65	70	80	80	90	120	165	210
M1	15	20	25	30	35	40	40	45	50	70	80
C2	30	37	44	53	57	63	63	82	95	120	150
TD	25,4	34,92	34,92	34,92	44,45	44,45	44,45	44,45	50,8	76,2	88,9
TL	25	35	35	35	45	45	45	45	51	76	89
E2	63,5	76	89	103	120	135	145	165	192	242	326
XV	A definir por el cliente										
F	10	16	16	19	19	22,5	22,5	22,5	25,5	25,5	43
E	63	76	89	100	121	127	140	165	190	241	321
R	41,5	52	65	76	89	97	110	125,5	145,5	190,5	245
UF	110	130	143	165	187	195	208	250	286	356	483
TF	87,5	105	117,5	133	156	162	175	208	240	300	403
FB	12	15	15	15	18	18	18	24	27	34	46



CILINDRO DIFERENCIAL	MONTAJE	DIMENSIONES
	M	
	N	
	L	
	I	
	D	
	E	
	F	
	G	